



Connecting Industry to Mathematics Instruction

NSF ATE Award # 1954291



Solutions: Crests and Sags Student Activity Sheet

Quantity: Flooding and Sight Distance

The North Carolina Department of Transportation (NCDOT) Location and Surveys Unit provides many customer services including the geometric design of our highway system. There have been several reports of flooding on a particular portion of highway causing hydroplaning of vehicles. Additionally, on a different highway, there have been a record number of car accidents where drivers claim they could not see an object in the road. You have been tasked with the following: 1. To determine if the roadway drainage is placed appropriately on the first highway and what changes need to be made to decrease the number of hydroplaning vehicles, and 2. To determine if any changes need to be made to the second highway that would decrease the number of accidents claimed.

Roads are designed with vertical curves to gently transition between the changes in elevation of the terrain. Vertical curves are the curves that go up and down through hills and valleys. “Sag” vertical curves are an area of concern for hydroplaning accidents due to standing water. Typically, NCDOT puts a drainage device at the low point of the sag. “Crest” vertical curves have their own problems in that drivers need to be able to stop in an appropriate amount of time if an object obstructs the road. Properly designed vertical curves consider the driver’s eye height and a desirable stopping sight distance to an obstacle in the road.

Important Terminology

- Station: 100 feet.
 - Projects start at station 0+00
 - Stations are written as the number of hundreds + remaining. Ex: The first station is 1+00 and the second station would be written as 2+00.
 - If you are 11+ 62.5 stations from the start of a project, you are 1162.5 feet from the start of the project.

In partnership with



- Slope: $\frac{\text{rise}}{\text{run}}$ (use feet for horizontal distance)
- Grade: $\frac{\text{rise}}{\text{run}} \times 100\%$ (use stations for horizontal distance)
 - 3% grade means for every 100 feet horizontal, the rise in the road is 3 feet vertically
 - 3% = .03, but using stations would be reported at a grade of 3

Preliminary Discussion Questions for Task 1:

1. After watching the launch video and completing the Desmos Activity, identify which picture represents a sag curve and which picture represents a crest curve. Explain your reasoning.




The curve on the left is a sag curve as the roadway dips downward and the right curve is a crest curve as the roadway travels upward as a hill.

2. Given the three pictures below, provided by the NCDOT, which one do you believe would have more flooding associated? Explain what factors could cause flooding.



The first picture would result in more flooding as the curve seems to “sag” the most. No drainage system put into place, drainage system put in the wrong place, capacity is not large enough to cover the volume of the water. Material is not appropriate for the road, the soil cannot tolerate the material placed. Other answers are possible.

3. What factors should be taken into consideration so that there is minimal flooding?
Make sure the road materials can take the volume of rain. Place the drainage system at the optimal point in the curve. Other answers are possible.
4. Using the picture below, answer the following questions.
 - a. What would the values of G_1 and G_2 represent? How would they affect the shape of the curve?
 G_1 would represent the grade of the back tangent – grade in which the curve begins or the largest slope on the curve prior to changing the direction. G_2 represents the value of the forward tangent – grade the curve ends or the largest slope after the direction changes.
 - b. What do you notice about the low point on the curve and the vertical point of intersection (VPI)? Why do you believe they are not the same?
The vertical point of intersection is below the low point on the curve. Since the VPI is where the tangents intersect which are lines of the largest grades on the curve going in and coming out and the slopes would be changing within the curve, but never go over the slope
 - c. If L represents the horizontal length of the vertical curve, what do the vertical point of curvature (VPC) and the vertical point of tangency (VPT) represent?

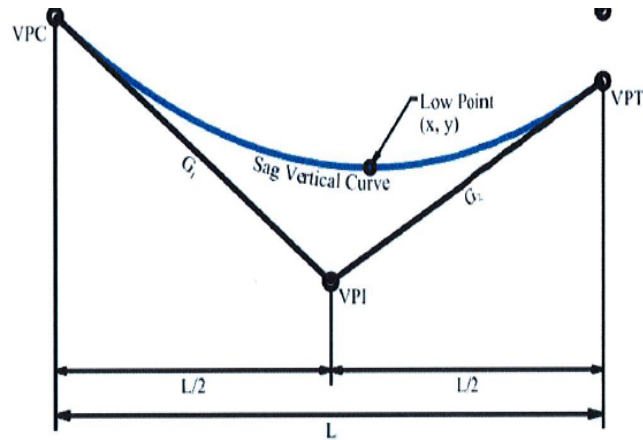


5. In looking at the given figure in question 3, what type of function would represent the curve?
Quadratic (parabolic shape)
6. If the beginning grade is -4.1% and the ending grade is 2.6%, are you dealing with a “sag” curve or a “crest” curve? Explain your reasoning.
You would be dealing with a sag curve since the grade starts in a downward slope and ends with a grade with an upward slope.
7. How would one determine the horizontal distance to the minimum or maximum elevation of the curve? Determine a generic formula to compute this value, labeled as x_m in terms of L , G_1 , and G_2 ,

where $a = \frac{G_2 - G_1}{2L}$ in $Y = Y_{VPC} + G_1x + ax^2$.

$$-\frac{b}{2a} = -\frac{G_1}{2\left(\frac{G_2 - G_1}{2L}\right)} = -\frac{G_1}{\left(\frac{G_2 - G_1}{L}\right)} = -\frac{LG_1}{G_2 - G_1}$$

Task 1 Questions:

8. You have a 400-foot vertical curve with a VPI station at 14+24.08 and elevation 104.77 provided the beginning grade is -5.1% and ending grade is 2.4%.
 - a. Draw a picture of the scenario above listing all important information provided on your picture.

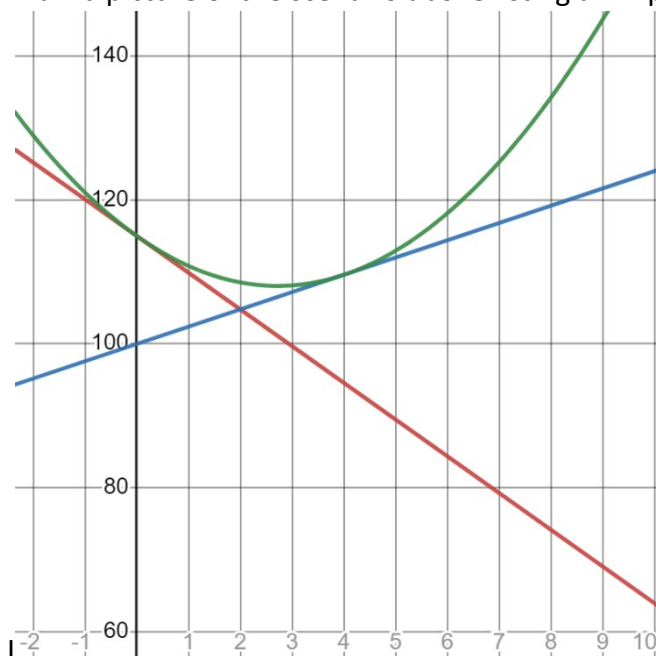

- b. Determine the vertical elevation for the VPC using the slope of a line and similar triangles.

114.97 feet

- c. Derive a curve elevation function, $Y = Y_{VPC} + G_1x + ax^2$. Use x in horizontal feet from the VPC and Y as the elevation above sea level.

$$Y = 0.00009375x^2 - 0.051x + 114.97$$

- d. Either use what you know about the relationship between grades and stations to rewrite the function or derive a curve elevation function, $Y = Y_{VPC} + G_1x + ax^2$ where x in horizontal stations from the VPC and Y as the elevation above sea level.

$$Y = 0.9375x^2 - 5.1x + 114.97$$

9. Calculate elevations for stations using the station interval of 100 feet and starting with the first even station. (Hint: Even station would be 14 + 00 and odd station would be 15 + 00)

114.97 ft, 110.81ft, 108.52 ft, 108.11ft, 109.57ft

10. Suppose in this scenario the storm water drop is placed 1.4 stations from the VPC. Without making any computations, do you think this the optimal placement for the roadway drainage? Explain.

No, it is not placed correctly. Since at station 2 the elevation was 108.52ft and continues to lower as it gets to station 3, so the optimal placement should be between 2 and 3 stations from the VPC

11. If you answered question 5 with a no, where should the storm water drop be placed for optimal roadway drainage? Determine the elevation for the appropriate storm drain placement.

$5.1/(2*0.9375) = 2.72$ stations from the VPC

12. During a hurricane event, the model predicts stormwater will rise to an elevation of 109.00 feet. Determine the interval, in stations, in which the roadway floods.

$x = 1.705$ and $x = 3.74$ which are at $13 + 94.6$ and $15 + 98.6$ stations, So flooding will occur between stations $13 + 94.6$ and $15 + 98.6$.


13. Why do you think the roadway will still flood even though the drain is at its optimal location for roadway drainage? What other factors may be contributing to the flooding issues?

The answers will vary here. It could be that the drainage system is not the right size for the area. There could be a clog in the system. The system needs to be updated. Etc.

Preliminary Discussion Questions for Task 2:

Note: $G_1 = g_1$ and $G_2 = g_2$.

14. Given the first figure below, what do the values of h_1 and h_2 represent? Note that these distances must be in feet. (Hint: Think about how h_1 relates to the car in front. The box in front of h_2 represents an object in the road.)

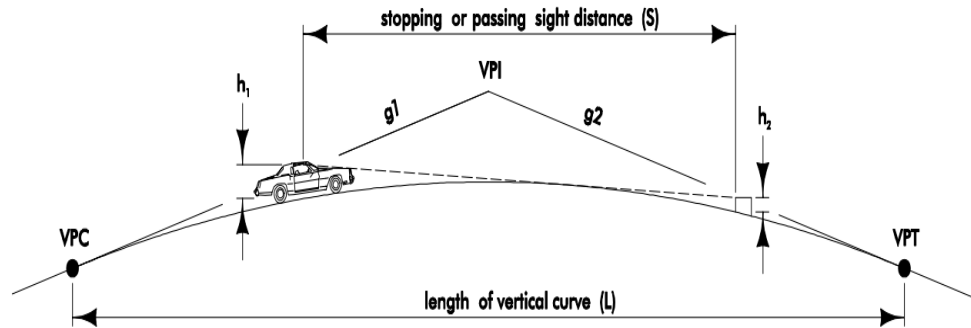

15. Solve $L = \frac{AS^2}{(\sqrt{2h_1} + \sqrt{2h_2})^2}$ given $A = |G_2 - G_1|$ is the absolute difference in tangent grades, when

$S < L$ for S. How many formulas result? Can we eliminate one? Why or why not?

Two formulas result and we can eliminate one because we cannot have a negative sight distance.

$$S = \sqrt{\frac{L}{A}} (\sqrt{2h_1} + \sqrt{2h_2})$$

16. Without making any computations, what happens to the sight distance, S , as the height of the object in the road gets larger? Explain your reasoning.

The sight distance would be greater because you could be further back from the object and see it sooner.

17. Explain how the driver's height would affect the sight distance. Why do you believe the American Association of State Highway and Transportation Officials (AASHTO) sets their standard for the driver's eye height to 3.5 feet?

The higher the person sits in the car, the greater the sight distance. To account for the minimum height of a car (compact car sits lower to the ground) and the height of a smaller driver.

Task 2 Questions

18. The average height of a deer is between 21 inches and 42 inches tall.
- Without making any calculations, which deer height would give you the greatest sight distance? Explain your reasoning. The taller deer.
The driver would be able to see the taller deer sooner
 - Using AASHTO's recommended value for driver's eye height, determine the sight distance for a 750-foot vertical curve with a start grade of 2.0% and an end grade of -3.0% for the average shortest and tallest deer assuming $S < L$. (Hint: Use the equation you found in number 15 and remember that when you are using grades your horizontal distance must be in stations and vertical distances are measured in feet.)
Shortest average deer: $S = 553.17$ feet; tallest average deer: $S = 648.07$ feet (Rounded each to 2 decimal places.)

19. Is the assumption $S < L$ met for each case above? Write the inequality.

The assumptions are met for both $553.17 < 750$ and $648.07 < 750$.

$$S = 1.47V(2.5) + \frac{V^2}{30 \left[0.347826 + \left(\frac{|G|}{100} \right) \right]} \text{ where } V$$

20. Given the stopping sight distance in feet is given by

the design speed in miles per hour, G is the grade (%), and the speed is currently set to 70 miles per hour on this stretch of road, answer the following:

- a. Compute the stopping sight distance with a grade going into the curve upwards of 2.0%.

$S=701.30005$ feet

- b. Compute the stopping sight distance with a grade going out of the curve downwards of 3.0%.

$S= 689.5478$ feet

- c. How do the values in parts a and b relate to the sight distances found in question 18?

These sight distances are both larger than those in problem 18 for the smallest and tallest average deer.

- d. Is the design speed appropriate for this stretch of road? Explain why or why not.

The speed limit is not appropriate because the stopping sight distances are both larger for the design speed than what is allowed for the smallest and largest deer.

21. Would you recommend a new speed limit in this situation? If so, determine the new design speed for this situation using the following formula in problem 20.

Yes; 60 mph as the two V values using the stopping distances for the smallest and largest deer result in values of 61 and 67 mph

22. Look at the graph of Length of Vertical Curve versus Algebraic difference in grades below. Does your recommended speed limit match what this graph suggests? If not, what error could have possibly happened causing a mismatch?

Answers will vary here.

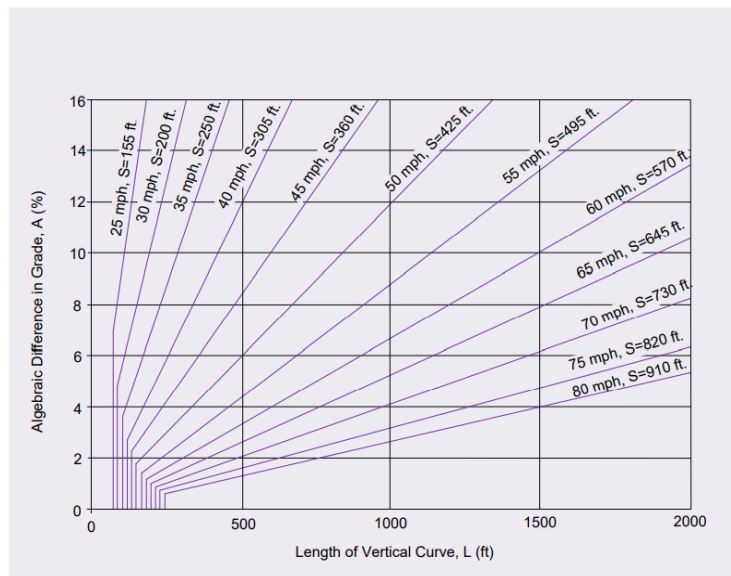


Figure taken from <https://wsdot.wa.gov/publications/manuals/fulltext/M22-01/1260.pdf>